


- NOTES :
- MATERIAL :  
INSULATOR :PA9T UL 94V-0, IVORY  
CONTACT : COPPER ALLOY
  - PANTING  
CONTACT:10u"MIN.Au OVER 50u"MIN.NICKEL  
SOLDER TAIL:100u"MIN.Sn OVER NICKEL
  - APPLICATION:  
MS & MS Duo & MS PRO & MS PRO Duo & MagicGate MS Duo & MS I/O Expansion & MS-ROM & MS Dou-ROM & MagicGate MS Memory Stick micro
  - PART NO : 7MSMS-B9-X310


更改 REV	設 變 內 容 MODIFICATION
A	ECN01238
B	ECN01268
C	ECN01340
D	ECN01545

PACKING:  
0 :TRAY  
1 :CARRIER

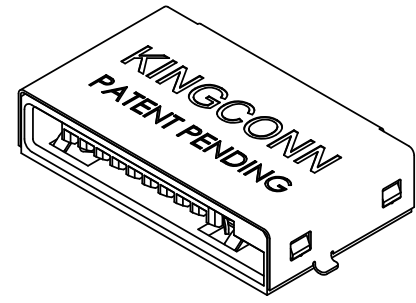


GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X±0.50	X°±5°	名 稱(TITLE) 10 IN 1 CONNECTOR Reverse type	
.X±0.30	.X°±2°		
.XX±0.20	.XX°±1°		
單 位(UNIT) mm	料 號(PART NO.) 7MSMS-B9-X310	圖 號(DWG NO.) 7MSMS-B9-X310-D	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 2:1
			張 數 SHEET 1/2
			角 法 PROJ. 更改 REV D

更改 REV	設 變 內 容 MODIFICATION
A	ECN01238
B	ECN01268
C	ECN01340
D	ECN01545

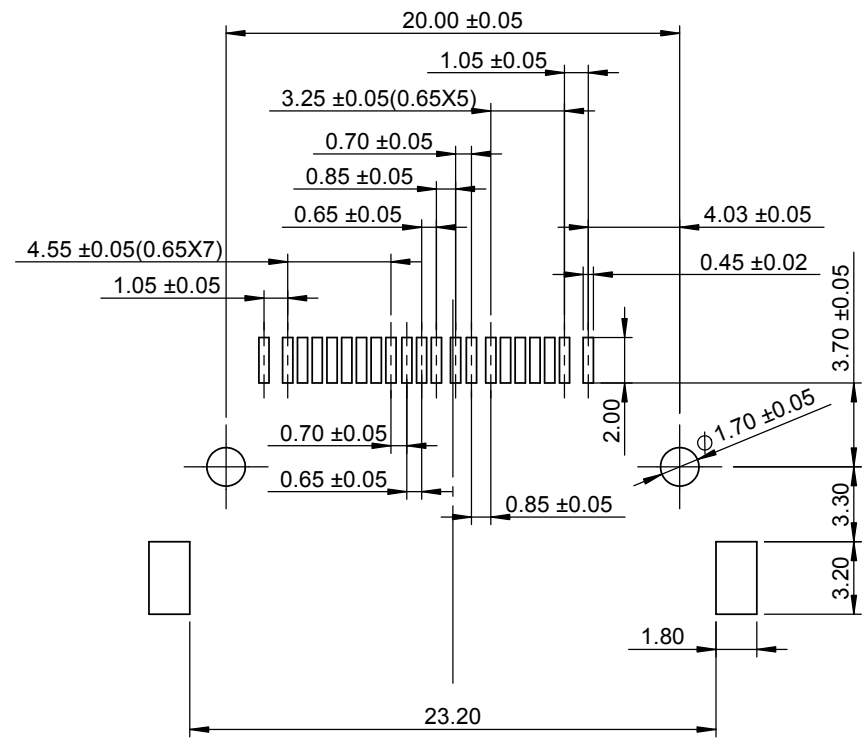

RECOMMEND PCB LAYOUT

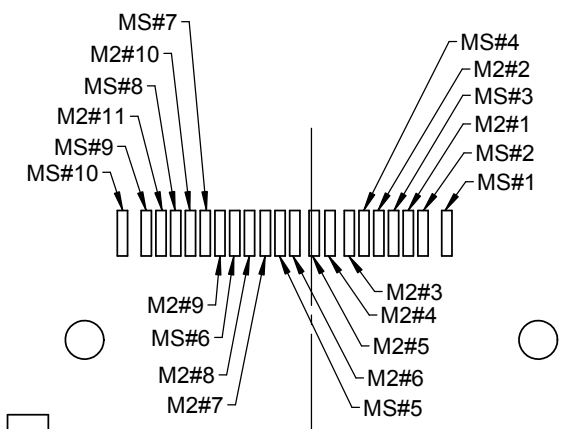

PIN ASSIGNMENT

PIN DEFINITION

MS#1	VSS	M2#1	BS
MS#2	BS	M2#2	DATA1
MS#3	DATA1	M2#3	DATA0
MS#4	SDIO/DATA0	M2#4	DATA2
MS#5	DATA2	M2#5	INS
MS#6	INS	M2#6	DATA3
MS#7	DATA3	M2#7	SCLK
MS#8	SCLK	M2#8	VCC
MS#9	VCC	M2#9	VSS
MS#10	VSS	M2#10	RESERVOD
		M2#11	RESERVOD

GENERAL TOLERANCE		<b>KINGCONN</b> 皇海科技股份有限公司 名 稱(TITLE) 10 IN 1 CONNECTOR Reverse type	
X ± 0.50	X ° ± 5 °		
.X ± 0.30	.X ° ± 2 °		
.XX ± 0.20	.XX ° ± 1 °		
單 位(UNIT) mm	料 號(PART NO.) 7MSMS-B9-X310	圖 號(DWG NO.) 7MSMS-B9-X310-D	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:0.333333 圖 號 SHEET 2 / 2 角 法 PROJ. 更 改 REV D