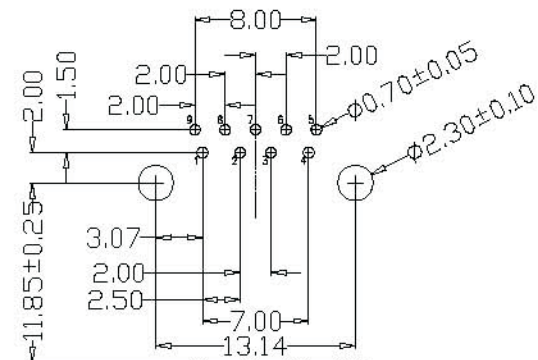


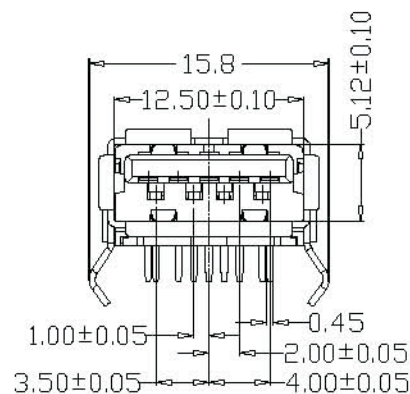



NOTES:
1.MATERIAL:
INSULATOR:PBT 30%GLASS FIBRE UL94 V-0 ;BLUE
CONTACT:5PIN-BRASS;4PIN-PHOSPHOR
COVER:BRASS
2.PLATING:
CONTACT AREA:Gold flash over 100u" Tin

CONNECTOR FRONT EDGE
REFERENCE PCB LAYOUT

PIN	Signal Name	Description
1	VBUS	Power
2	D-	USB2.0 differential pair
3	D+	
4	GND	Ground for power return
5	StdA_SSRX-	SuperSpeed receiver differential pair
6	StdA_SSRX+	
7	GND_DRTX-	Ground for signal return
8	StdA_SSTX-	SuperSpeed transmitter differential pair
9	StdA_SSTX+	
Shell	Shield	Connector metal shell

GENERAL TOLERANCE		有標(TITLE)	USB AF DIP 3.0								
X± 0.50	X*± 5 °										
.X± 0.30	.X*± 2 °										
.XX± 0.20	.XX*± 1 °										
單位(UNIT) mm	料號(PART NO) 7USBC-F0-0011	圖號(DWG NO) 7USBC-F0-0011-A									
審核(APPROVAL)	校對(CHECKED)	繪圖(DRAWN)	<table border="1"> <tr> <td>比例 SCALE</td> <td>1:1</td> <td>張數 SHEET</td> <td>1 / 1</td> </tr> <tr> <td>人 BY</td> <td></td> <td>更改 REV</td> <td>A</td> </tr> </table>	比例 SCALE	1:1	張數 SHEET	1 / 1	人 BY		更改 REV	A
比例 SCALE	1:1	張數 SHEET	1 / 1								
人 BY		更改 REV	A								