

Specification


Outer shaft

Decks;1  
 Total Poles;1  
 Positions;24 (Endless)  
 Contact Type;Non-shorting  
 Material Used;Glass epoxy  
 Step Angle;15°  
 Length of the shaft;16mm  
 Shape of the shaft;Round


Inner shaft

Decks;1  
 Total Poles;1  
 Positions;24 (Endless)  
 Contact Type;Non-shorting  
 Material Used;Glass epoxy  
 Step Angle;15°  
 Length of the shaft;30mm  
 Shape of the shaft;φ2.8 Knurled

Contact position configuration

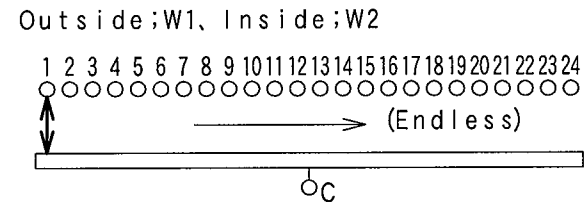

Mounting hole for panel

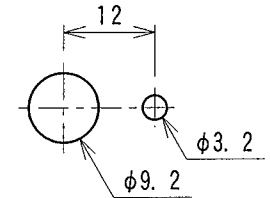

Attached Parts

- M6 nut (t=2mm)
- Toothed lock washer (t=1)
- Flat washer (t=0.5mm)

All the other specifications are based on TOSOKU general product catalogue.

		MODEL NUMBER	RP7X	DATE	Nov/18/2016	NAME	Rotary Switch	
		CUSTOMER	F. K. Industrievertretungen	SCALE	1 : 1	DRAWING No.	PAGE	
		CUSTOMER'S PART No.		DESIGNED	S. Nakai	Reference drawing 1/1		
		PART No.		CHECKED	K. Ando			
MARK	DATE	CHANGE SUBJECT	REVISED	APPROVED	<i>u. nakai</i>			