Rotary Switch

SRCL 38 SERIES

APPLICABLE TO:
1. Function selection of multi-section (two wafers one section), multi-pole, multi-position (2-12 positions) products.
2. Computer peripheral product, data transfer switch.
3. Function selection of instrument machines.
4. Volume control of Hi-End audios.
5. Instruments.

SPECIFICATION

ITEM	SPECIFICATION
RATING	DC 30V 0.5A
CONTACT RESISTANCE	25mΩ MAX
INSULATION RESISTANCE	DC 500V 100MΩ MIN
WITHSTAND VOLTAGE	500V 1 MINUTE
TORQUE	1 TO 3 SECTION 2±1kg (REFERENCE) OVER 3 SECTION 3±1.5kg

ILLUSTRATION OF APPLICABLE POLE & POSITION

per section (max. 12 sections)
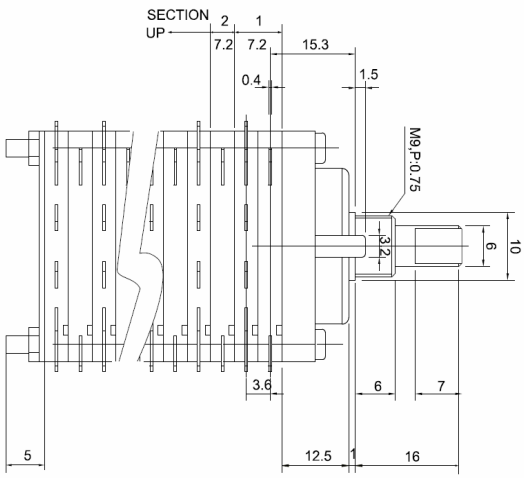
POLE	POSITIONS	POLE	POSITIONS
6	2	2	6
4	3	2	7-12
3	4		
2	5-6