

# Rotary Switch

## SRCP 20 SERIES

### APPLICABLE TO:

1. Mini products use.
2. Can be turned, even without knob.
3. Test machines, OA equipment.
4. Function selection of signal instrument

### SPECIFICATION

#### ITEM


|                       |                       |
|-----------------------|-----------------------|
| RATING                | AC 150V 30mA          |
| CONTACT RESISTANCE    | 25mΩ MAX              |
| INSULATION RESISTANCE | DC 500V 100MΩ MIN     |
| WITHSTAND VOLTAGE     | 1000V 1 MINUTE        |
| TORQUE                | 250±100g (REFERENCE)  |
| TIMING                | NON SHORTING          |
| LIFE TEST             | 20 000 CYCLES NO LOAD |

### ILLUSTRATION OF APPLICABLE POLE & POSITION


| POLE | POSITIONS | POLE | POSITIONS |
|------|-----------|------|-----------|
| 1    | 3-12      | 2    | 3-6       |
| 3    | 3-4       |      |           |

# Rotary Switch


## 1 Pole

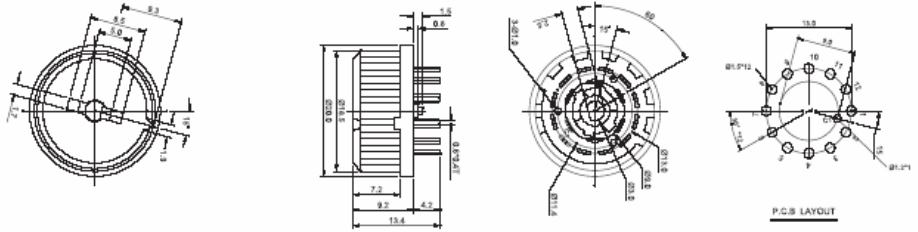


## 2 Pole

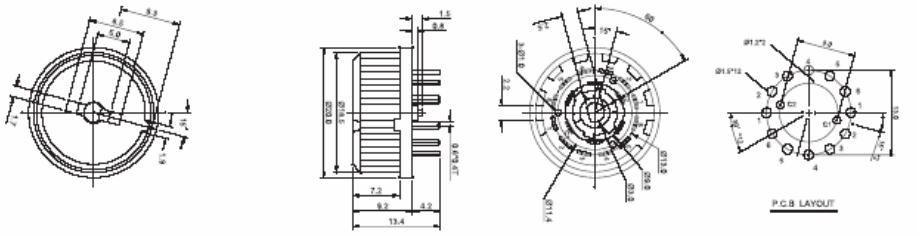

## 3 Pole

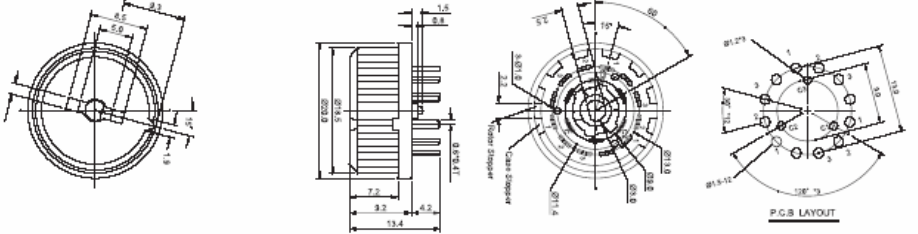

## with shaft

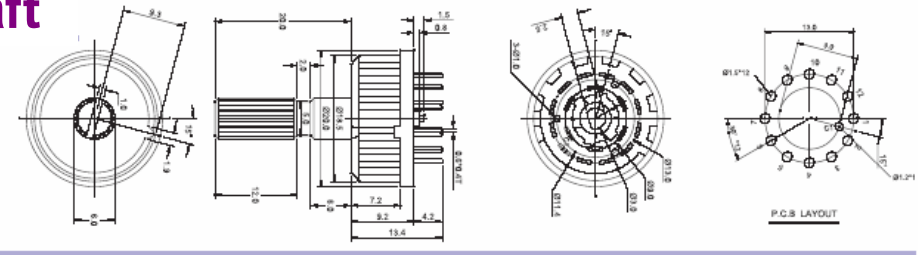

## shaft styles

